



Model 210

Circuit Board-Mountable Pressure Transducer

Features

- Fully signal conditioned
- High level output
- Excellent long term stability
- RFI/EMI immunity
- Easily customized package
- Optional excitations, outputs, and accuracies
- Wide operating temperature range
- High signal to noise ratio
- Meets CE conformance standards

Applications

- Analytical measurement and control
- OEM medical systems

Setra's Model 210 is the ultimate in circuit board-mountable pressure transducers. In addition to the convenience of quick PCB installations, the 210 offers wide media compatibility with its stainless steel sensor construction. The calibrated high level output eliminates the need for additional circuit and calibration labor costs.

Packaged in compact plastic enclosure (1.25" diameter footprint), the Model 210 incorporates Setra's unique capacitance technology, known worldwide for its solid stability, accuracy and thermal performance. With the custom ASIC circuit and capacitive sensor, the Model 210 performs with reliability and EMI/RFI immunity. The Model 210 can be customized to accommodate various package and performance requirements, and is designed for OEM applications.

Pressure ranges

0 psig to:	Proof Pressure (psig)	Burst Pressure (psig)
1	2	250
2	4	250
5	10	500
10	20	500
15	30	500
25	50	500
50	100	500
100	200	500

Note: Our pressure sensor products are not necessarily designed or manufactured for use as a "critical component" in a "critical device", as those terms are defined in the Medical Devices Subchapter contained in the Food and Drug Administration Rules, 21CFR800.
 Note: Setra adheres to strict quality standards including ISO 9002 and ANSI-Z540-1. The calibration of this product is NIST traceable.
 U.S. Patent nos. 4054833, 5442962, 6205861 B1



Specifications

Performance data	Standard	Optional	
Accuracy RSS	±1.0% FS	±0.5% FS	±0.25% FS
Non-linearity, (BFSL)	±0.98% FS	±0.98% FS	±0.22% FS
Hysteresis	0.20% FS	0.10% FS	0.10% FS
Non-repeatability	0.05% FS	0.05% FS	0.05% FS

Thermal effects

Zero shift %FS/100°F(%FS/50°C)	<±2.0 (<±1.8)
Span shift %FS/100°F(%FS/50°C)	<±1.5 (<±1.4)
Long term stability	0.5% FS/YR

Electrical data

Circuit	3-Wire (+In, +Out, Common)
Excitation ¹	24 VDC (21.6 to 32) 12 VDC (10.8 to 18.4) 5VDC (4.9 to 8.1)
Output ²	1 to 6 VDC 0.5 to VDC 0.5 to 5.5 VDC
Output impedance	<100 Ohms
Response time	10 Milliseconds

¹See ordering code for excitation/ output availability.

²Calibrated into 50K ohm load or greater.

Zero output factory set to within ±25 mV.

Span (full scale) output factory set to within 50 mV.

Specifications subject to change without notice

Dimensional Data

Case	Fire retardant glass-filled polyester
Sensor	17-7 stainless steel for ranges ≥5 PSI Other ranges, 300 series stainless steel
Pressure fittings	3/16 O.D. Barbed nylon pressure fitting for 1/8" I.D. tubing
Electrical Connection	Solder pins, 0.30" round on 0.2" centers
Weight (approx.)	0.5 ounces

Environmental Data

Operating temperature	-4 to +176°F (-20 to +80°C)
Storage temperature	-40 to +185°F (-40 to +85°C)
Operating humidity	0 to 95% RH non-condensing
Storage humidity	0 to 98% RH non-condensing
Vibration	5g Operating
Shock	<100g


Pressure media

Gases or liquids compatible with 304 SS, 17-7 PH series stainless steel, nylon, polyester, and silicone.

Ordering information

Example part number: 2101001PG1B35C1C

Model 210 with a Pressure range of 0 to 1 PSI, barbed fitting, 12 VDC excitation, 0.5 to 4.5 VDC output with PC board mountable pins, and an accuracy of ±1.0%.




[1]	[2]	[3]	[4]	[5]	[6]	[7]																																														
Model	Pressure range	Pressure type	Fitting	Exc. / Output	Elec. termination	Accuracy																																														
2101 Model 210	<table border="1"> <tr><td>001P</td><td>1 PSI</td></tr> <tr><td>002P</td><td>2 PSI</td></tr> <tr><td>005P</td><td>5 PSI</td></tr> <tr><td>010P</td><td>10 PSI</td></tr> <tr><td>015P</td><td>15 PSI</td></tr> <tr><td>025P</td><td>25 PSI</td></tr> <tr><td>050P</td><td>50 PSI</td></tr> <tr><td>100P</td><td>100 PSI</td></tr> </table>	001P	1 PSI	002P	2 PSI	005P	5 PSI	010P	10 PSI	015P	15 PSI	025P	25 PSI	050P	50 PSI	100P	100 PSI	<table border="1"> <tr><td>G</td><td>Gauge</td></tr> </table>	G	Gauge	<table border="1"> <tr><td>1B</td><td>Straight barbed</td></tr> <tr><td>1D</td><td>Right angle fitting</td></tr> </table>	1B	Straight barbed	1D	Right angle fitting	<table border="1"> <tr><td>24</td><td>24 VDC/ 0.5-5.5 VDC</td></tr> <tr><td>25</td><td>24 VDC/ 0.5-4.5 VDC</td></tr> <tr><td>28</td><td>24 VDC/ 1-6 VDC</td></tr> <tr><td>35</td><td>12 VDC/ 0.5-4.5 VDC</td></tr> <tr><td>38</td><td>12 VDC/ 1-6 VDC</td></tr> <tr><td>45</td><td>5 VDC/ 0.5-4.5 VDC</td></tr> </table>	24	24 VDC/ 0.5-5.5 VDC	25	24 VDC/ 0.5-4.5 VDC	28	24 VDC/ 1-6 VDC	35	12 VDC/ 0.5-4.5 VDC	38	12 VDC/ 1-6 VDC	45	5 VDC/ 0.5-4.5 VDC	<table border="1"> <tr><td>C1</td><td>PC board mountable pins</td></tr> </table>	C1	PC board mountable pins	<table border="1"> <tr><td colspan="2">Standard</td></tr> <tr><td>C</td><td>±1.0% FS</td></tr> <tr><td colspan="2"><i>Options (w/Cal Cert)</i></td></tr> <tr><td>H</td><td>±0.5%</td></tr> <tr><td>F</td><td>±0.25%</td></tr> </table>	Standard		C	±1.0% FS	<i>Options (w/Cal Cert)</i>		H	±0.5%	F	±0.25%
001P	1 PSI																																																			
002P	2 PSI																																																			
005P	5 PSI																																																			
010P	10 PSI																																																			
015P	15 PSI																																																			
025P	25 PSI																																																			
050P	50 PSI																																																			
100P	100 PSI																																																			
G	Gauge																																																			
1B	Straight barbed																																																			
1D	Right angle fitting																																																			
24	24 VDC/ 0.5-5.5 VDC																																																			
25	24 VDC/ 0.5-4.5 VDC																																																			
28	24 VDC/ 1-6 VDC																																																			
35	12 VDC/ 0.5-4.5 VDC																																																			
38	12 VDC/ 1-6 VDC																																																			
45	5 VDC/ 0.5-4.5 VDC																																																			
C1	PC board mountable pins																																																			
Standard																																																				
C	±1.0% FS																																																			
<i>Options (w/Cal Cert)</i>																																																				
H	±0.5%																																																			
F	±0.25%																																																			

While we provide application assistance on all Setra products both personally and through our literature, it is the customer's responsibility to determine the suitability of the product in the application.

Please contact factory for configurations not shown.

Dimensions

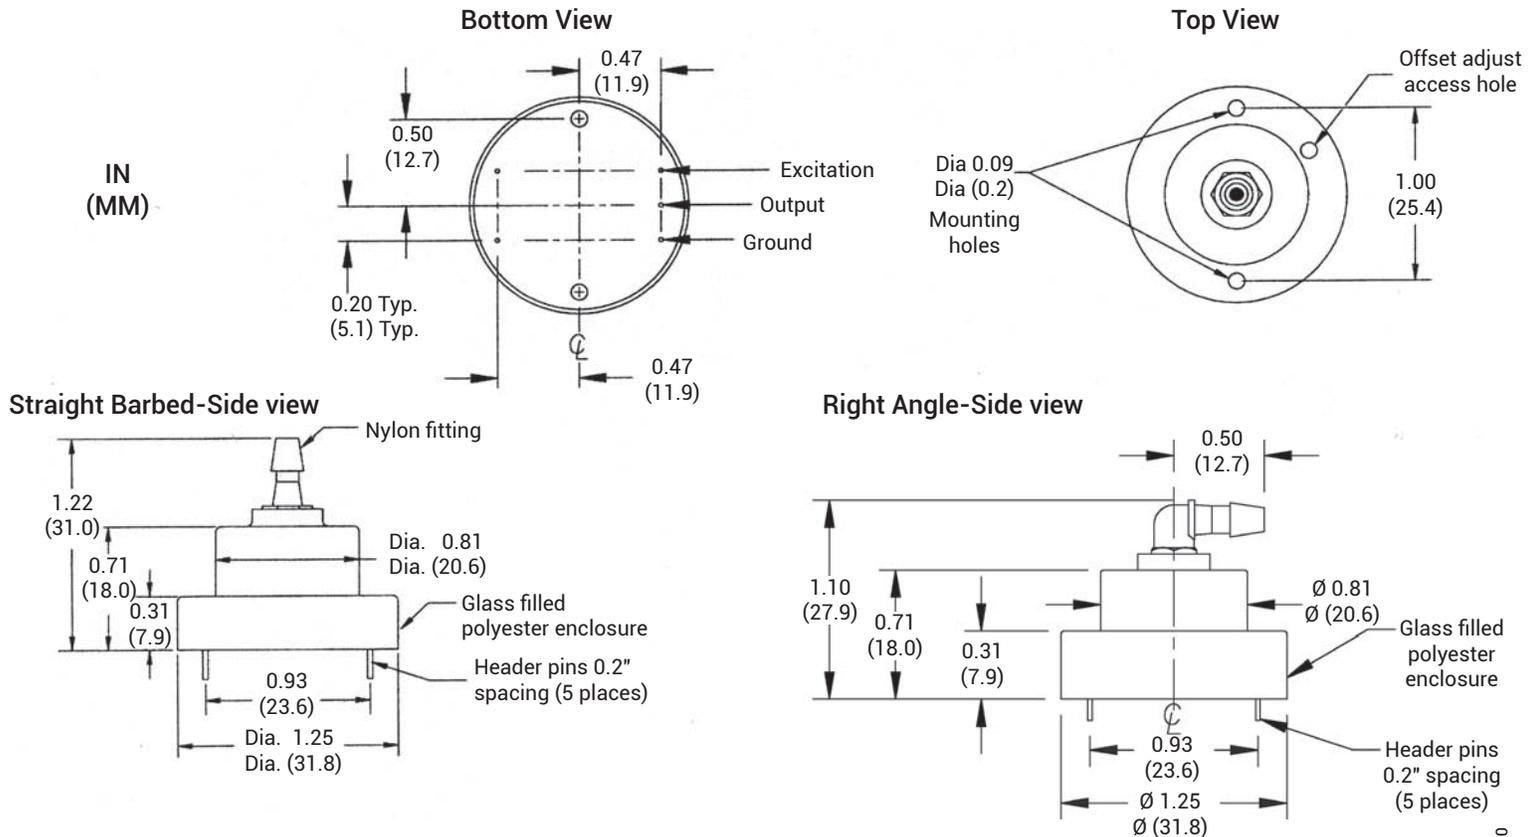



Setra Systems, Inc.
159 Swanson Road
Boxborough, MA 01719
800.257.3872
www.setra.com

© Setra Systems, Inc. All rights reserved.

The Setra Systems name and logo
are trademarks of Setra Systems, Inc.