

Sanitary Pressure & Level Transmitters
Intelligent Pressure & Level Transmitter



25 SERIES

- Ranges from -160 inH₂O vac to 1,160 psig
- Hart® protocol output available
- 316 Stainless Steel wetted parts
- Strong flush diaphragm with minimal fill volume
- Can be cleaned-in-place (CIP) or steamed-in-place (SIP)
- 3A certified



APPLICATIONS

- Food & dairy
- Chemical processing
- Pharmaceutical

FEATURES & BENEFITS

- All Stainless Steel housing
- Easy programming and range adjustment without test pressure via on-board display
- Accuracy 0.2% of adjusted span
- 4:1 turn down
- Active temperature compensation
- Hart® protocol optional

SPECIFICATIONS

Output signals	4 mA to 20 mA 2-wire, 4 mA to 20 mA 2-wire and Hart® signal
Pressure ranges	-160 inH ₂ O vac to 1,160 psig
Accuracy	0.2% of adjusted span
Stability	<0.1%/year
Adjustment	By 3 push buttons on display or optional Hart® signal
Response time	<100 ms
Service life	>10 years
Temperature ranges	-4 °F to 212 °F (-20 °C to 100 °C); 293 °F (145 °C) for 45 min.
Power requirement*	12 Vdc to 36 Vdc
Measuring element	316 Stainless Steel (Hastelloy C or Tantalum optional)
Connection	316 Stainless Steel
Housing material	304 Stainless Steel (316 Stainless Steel optional)
Environmental rating	IP66 (IP68 optional)
Electrical protection	IP66 (NEMA 4X), IP68 (NEMA 6) optional
Weight	Approximately 2.20 lb. (Depending on process connection)

* Unregulated




ORDERING INFORMATION			
SERIES	254		
TRI-CLAMP SIZE	12 1-1/2"	24 3"	16 2"
PRESSURE RANGES (Adjustable)	40inH₂O-vac -40 inH ₂ O to 0 inH ₂ O* 160inH₂O-vac -160inH ₂ O to 0 inH ₂ O 14.7/43-vac -14.7 psig to 43 psig 14.7/130-vac -14.7 psig to 130 psig 14.7/335-vac -14.7 to 335 psig 14.7/1145-vac -14.7 psig to 1,145 psig	16/40 inH₂O 0 inH ₂ O to 16 inH ₂ O to 0 inH ₂ O to 40 inH ₂ O (.6 psig to 1.45 psig) 40/160 inH₂O 0 inH ₂ O to 40 inH ₂ O to 0 inH ₂ O to 160 inH ₂ O (1.45 psig to 5.8 psig) 160/637 inH₂O 0 inH ₂ O to 160 inH ₂ O to 0 inH ₂ O to 637 inH ₂ O (5.8 psig to 23 psig) 14.5/58 14.5 psig to 58 psig (0 inH ₂ O to 400 inH ₂ O to 0 inH ₂ O to 1,607 inH ₂ O) 29/145 29 psig to 145 psig (0 inH ₂ O to 803 inH ₂ O to 0 inH ₂ O to 4,017 inH ₂ O) 87/350 87 psig to 350 psig (0 inH ₂ O to 2,410 inH ₂ O to 0 inH ₂ O to 9,697 inH ₂ O) 290/1160 290 psig to 1,160 psig (0 inH ₂ O to 8,035 inH ₂ O to 0 inH ₂ O to 32,140 inH ₂ O)	
ACCURACIES	1 0.2% of adjusted span		
OUTPUT SIGNALS	1 4 mA to 20 mA, 2-wire	43 4 mA to 20 mA, 2-wire and Hart® signal	
ELECTRICAL CONNECTIONS	25 M12 x 1 (4-pin)	71 PG9 Cable Gland	
OPTIONS	TC Transparent Cover (for display)		

Please consult your local NOSHOK Distributor or NOSHOK, Inc. for availability and delivery information.


* Not available in 1-1/2" Tri-Clamp

EXAMPLE

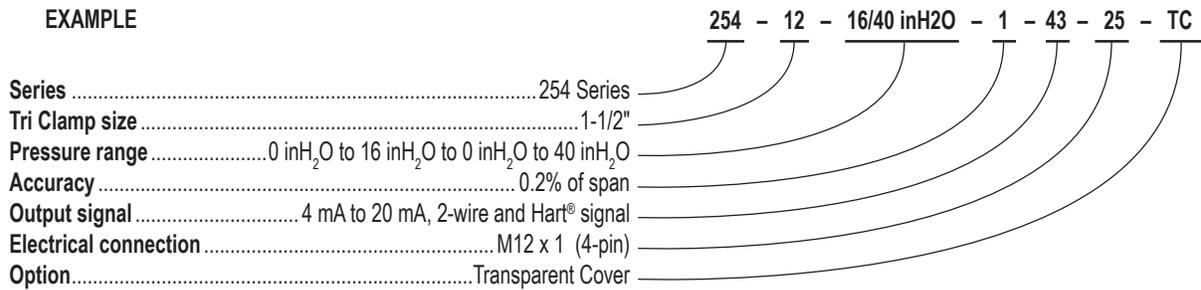

M12 x 1 (4-PIN) WIRING

1	Brown	V+
2	White	V-
3	Blue	Not used
4	Black	Not used



*1-1/2", 2" and 3" Tri-Clamp connections available