

- Time- and cost-saving installation on DIN rails or mounting plates
- High availability thanks to redundant auxiliary power supply with signalling contact and separate signalling contact for segment errors
- Special slot for 9415 series DCM for online transmission of physical layer diagnostics

09

MY R. STAHL 9419B



9419 series bus carriers allow 9412 series fieldbus power supplies for FF H1 segments to be installed quickly and securely. Variants are available for eight segments with simplex supply and for four or eight segments with redundant supply.

Connectors are integrated in this version to connect the AKB336 system cable for Yokogawa ALF111 host assemblies.

	NEC® 500 CE Code Appendix J					
	Class I		Class II		Class III	
Division	1	2	1	2	1	2
Ex interface						
Installation in		•				

	CE Code Section 18					
	NEC® 505			NEC® 506		
	Class I					
Zone	0	1	2	20	21	22
Ex interface						
Installation in			•			

	IECEX / ATEX					
	Zone 0		Zone 1		Zone 2	
Zone	0	1	2	20	21	22
Ex interface						
Installation in			•			

Selection Table						
Product description						
ISbus fieldbus technology Yokogawa bus-Carrier for Zone 2						
Trunk supply	Number of segments	Number of slots	Product Type	Art. No.	Weight lb	
Redundant	4	8 FPS + 1 DCM	9419/04R-YO1-02A5	221455	1.32 lb	
	8	16 FPS + 1 DCM	9419/08R-YO1-02A5	221456	2.65 lb	
Simplex	8	8 FPS + 1 DCM	9419/08F-YO1-01A5	221454	1.32 lb	

The shield terminals (see accessories) must be ordered separately for the bus-carrier.




Please order fieldbus power supplies (FPS), diagnosis communication module (DCM) and linking devices (LD) separately.

Technical Data	
Explosion Protection	
FMus certificate	3026646
cFM certificate	3026646C
cFM certificate	3026646C
Marking cFMus	Nonincendive for, Class I, Div. 2, Groups A,B,C,D; T4, at Ta = 70 °C Class I, Zone 1, AEx/Ex nA nC IIC T4 , at Ta = 70 °C 9419 6 031 001 1
IECEX gas explosion protection	Ex nA nC IIC T4 Gc
Certificates	ATEX (BVS), Canada (FM), IECEX (BVS), USA (FM)
Electrical Data	
Error detection Power Fail (pri / red)	Contact "PF" (35 V/100 mA) closed in go-state
Error detection Diagnostic	Contact "Dia" (35 V/100 mA) closed in go-state




Technical Data

Auxiliary Power	
Nominal voltage V_{nom}	24 V DC
Redundant supply	Yes, diode-decoupled
Ambient Conditions	
Ambient temperature °F	-4 °F ... +158 °F
Ambient temperature °C	-20 °C ... +70 °C


Accessories

Figure	Description	Product Type	Art. No.	Weight lb
Diagnostics communication module 9415				
	Transmission of diagnostic data for up to eight segments via FF H1	9415/00-310-42	207903	0.53
Fieldbus power supply				
	Fieldbus supply, diagnostics and adjustable warning level	9412/00-320-11s	200588	0.3
Spring clamp clip				
	Spring clamp clip KLBÜ C01	clamping yoke KLBÜ CO 1	113509	-


Dimensional Drawings (All Dimensions in mm [inches]) – Subject to Alterations

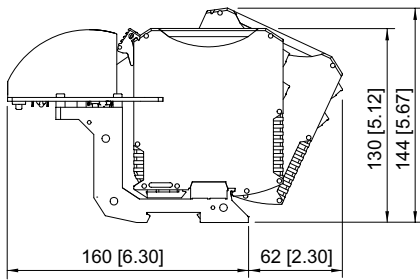


9419 bus-Carrier with modules




9419/04R bus-Carrier for 4 fieldbus segments



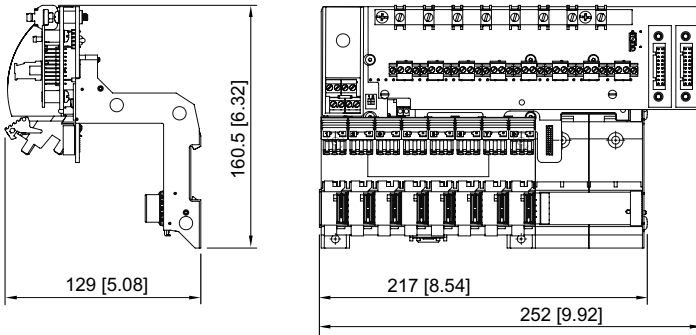

9419/08F bus-Carrier for 8 fieldbus segments

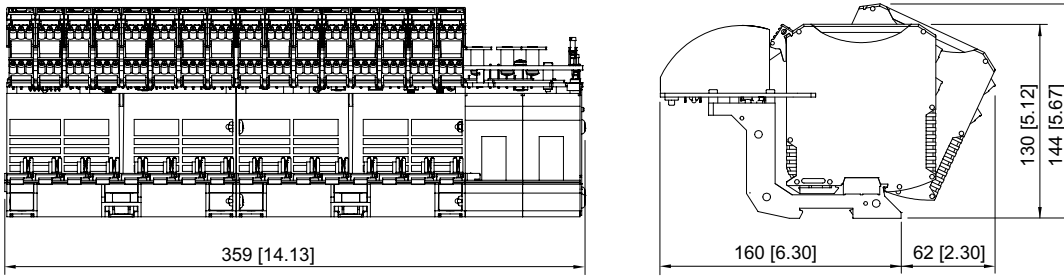

9419/08R bus-Carrier for 16 fieldbus segments