




- For intrinsically safe 4-wire Ethernet 100BASE-TX-IS in Zone 1
- For class 1 fibre optic cables (IEC 60825-1) in Zone 1
- Supports 100 Mbit/s Ethernet communication
- Transmission range up to 2 km (multi-mode)/30 km (single-mode)
- Easy commissioning, no configuration required
- Installation in Zones 1, 2 or in safe areas

A5

MY R. STAHL 9723A

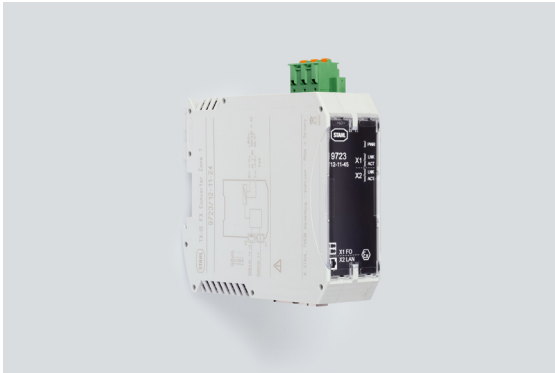

The Ethernet media converters for installation in Zone 1 are used for conversion and galvanic separation of intrinsically safe Ethernet via copper/CAT cable (TX) to optical Ethernet via fibre optic cables (FX). The copper Ethernet signal is designed with "ia" inherent safety type of protection, while the optical Ethernet signal meets the requirements of class 1 according to IEC 60825-1. Both interfaces are suitable for operation in hazardous areas of Zones 1 and 2. This means that industrial Ethernet cables and fibre optic cables can also be used in hazardous areas and may be connected and disconnected during operation (i.e. hot plug). Due to the limited cable length of copper Ethernet (max. 100 m), the media converter is ideal for operating the IS1+ Remote I/O system and enables transmission lengths to reach up to several kilometres.

	IECEx / ATEX					
Zone	0	1	2	20	21	22
Ex interface	•	•	•			
Installation in		•	•			

Selection Table						
Ethernet media converter						
Product variant	Interface 1	Interface 2	FO transmission distance	Product Type	Art. No.	Weight
Multi mode	1 port, 100BASE-FX MM LC	1 Port, 100BASE-TX-IS, RJ45	2 km	9723/12-11-24	294420	350 g
Single mode	1 port, 100BASE-FX SM LC	1 Port, 100BASE-TX-IS, RJ45	30 km	9723/12-11-64	294451	350 g

Technical Data		
Variant	9723/12-11-24	9723/12-11-64
Explosion Protection		
IECEx gas explosion protection	Ex eb ib mb [ia Ga] IIC T4 Gb	Ex eb ib mb [ia Ga] IIC T4 Gb
IECEx dust explosion protection	[Ex ia Da] IIIC	[Ex ia Da] IIIC
ATEX gas explosion protection	Ex II 2 (1) G Ex eb ib mb [ia Ga] IIC T4 Gb	Ex II 2 (1) G Ex eb ib mb [ia Ga] IIC T4 Gb
ATEX dust explosion protection	Ex II (1) D [Ex ia Da] IIIC	Ex II (1) D [Ex ia Da] IIIC
Certificates	ATEX (TUR), IECEx (TUR)	ATEX (TUR), IECEx (TUR)
Declaration of conformity	ATEX (EUK)	ATEX (EUK)
Safety Data		
Max. FO radiant power	15 mW (Class 1)	15 mW (Class 1)
FO interface zone	1, 2	1, 2
Electrical Data		
Transfer rate	100 Mbit/s	100 Mbit/s

Technical Data

Variant	9723/12-11-24	9723/12-11-64
Electrical Data		
Interface 1 version	Class 1 (IEC 60825-1)	Class 1 (IEC 60825-1)
FO wavelength	1310 nm	1310 nm
FO attenuation	1 dB / km	0.3 dB / km
FO bandwidth	800 MHz * km	3.5 ps / nm * km
FO connection type	LC plug connector	LC plug connector
FO fibre cross section	50/125 µm [min. OM2]	9/125 µm [OS1, OS2]
FO optical budget	12 dB	16 dB
Interface 2 version	Ex ia (100BASE-TX-IS)	Ex ia (100BASE-TX-IS)
Ethernet interface connection	RJ45 (EIA/TIA 568B)	RJ45 (EIA/TIA 568B)
Transmission distance	Up to 100 m (Cat5e or better)	Up to 100 m (Cat5e or better)
Auxiliary Power		
Nominal voltage	24 V DC	24 V DC
Voltage range DC	19.2 ... 32 V DC	19.2 ... 32 V DC
Power supply	3-pin spring clamp terminal	3-pin spring clamp terminal
Max. current consumption	120 mA	120 mA
Ambient Conditions		
Ambient temperature	-40 °C ... +75 °C	-40 °C ... +75 °C
Mechanical Data		
Degree of protection (IP)	IP30	IP30
Enclosure material	PA 6.6	PA 6.6

Dimensional Drawings (All Dimensions in mm [inches]) – Subject to Alterations

