



Specialty

Bore Wire Thermocouple with Ceramic Insulators

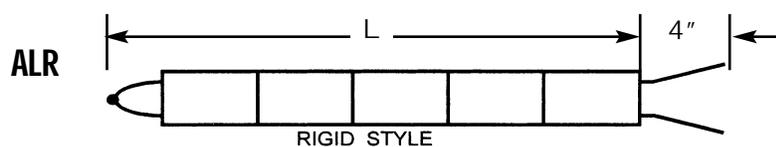

*Bead Dia. = Specify I.D. of Protection Tube

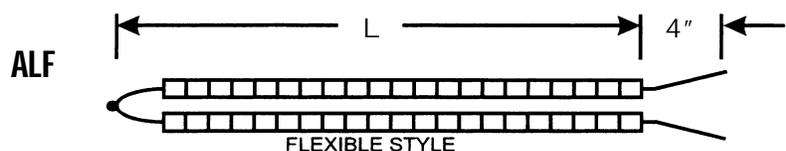


Thermocouple Elements Product Specifications & Options

To order: For each item required, specify the **product** name along with appropriate **codes** or **measurements** from each of the columns below.

| Product | Sensor | Gauge (AWG) | Probe Length | Connection | *Bead Dia. (in.) | Special |
|---------|--------|--------------|-----------------|------------|------------------|----------|
| ALF | 1. J | 8" | L=Specify (in.) | B-Butt | * See note above | D-Duplex |
| ALR | 2. K | 14" | | T-Twist | | |
| | 3. T | 20" | | | | |
| | 4. R | SP - Special | | | | |
| | 5. S | | | | | |

Pipe Clamp Thermocouples

A600

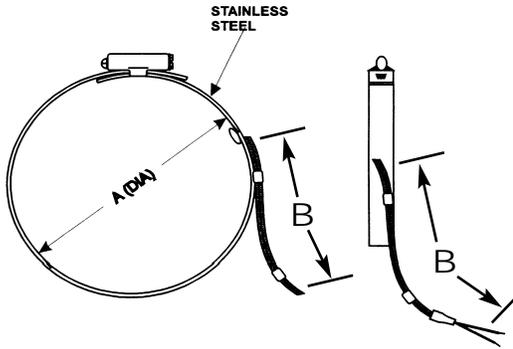


Ring Terminal Thermocouples

A700



Weld Pad Thermocouples

A800

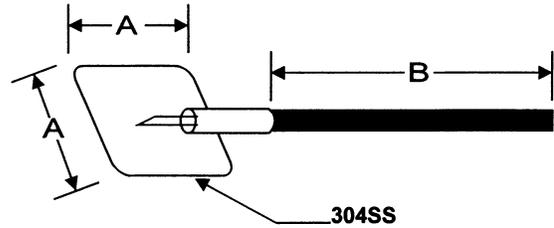

Thermocouple Product Specifications & Options

To order: For each item required, specify the **product** name along with appropriate **codes** or **measurements** from each of the columns below.

| Product | Type | Pipe Clamp Diameter (A) | Lead Length (B) | Termination | Leads | Options |
|---------|--------------------------------|----------------------------|-----------------|---|---|---|
| A600 | 1. J 2. K 3. T 4. RTD | Specify (in.) | Specify (in.) | 1-Strip Leads 2-Spade lugs 3-Standard plug 4-Standard jack 5-Mini plug 6-Mini jack | F-Fiberglass S-Fiberglass stranded FB-Fiberglass Stainless overbraid H-Stainless armor P-PVC solid PS-PVC stranded T-Teflon solid TT-Teflon stranded | U-Ungrounded C-NIST certified SP-Special |
| Product | Type | "A" (Bolt Size) | Lead Length | Termination | Leads | Options |
| A700 | 1. J 2. K 3. T | #8 #10 1/4" | B=Specify (in.) | 1-Strip Leads 2-Spade lugs 3-Standard plug 4-Standard jack 5-Mini plug 6-Mini jack | F-Fiberglass S-Fiberglass stranded FB-Fiberglass Stainless overbraid H-Stainless armor P-PVC solid PS-PVC stranded T-Teflon solid TT-Teflon stranded | U-Ungrounded C-NIST certified SP-Special |
| Product | Type | Weld Pad Size A x A | Lead Length | Termination | Leads | Options |
| A800 | 1. J 2. K 3. T | 1" 1 1/2" SP-Special | B=Specify (in.) | 1-Strip Leads 2-Spade lugs 3-Standard plug 4-Standard jack 5-Mini plug 6-Mini jack | F-Fiberglass S-Fiberglass stranded FB-Fiberglass Stainless overbraid 5-Mini jack P-PVC solid PS-PVC stranded T-Teflon solid TT-Teflon stranded | U-Ungrounded C-NIST certified SP-Special (i.e. curved to pipe dia.) |

